



Econo-Max 2PV (TL200)
Two Ply Polyester—Vinyl Laminate

sizes 1½" – 24" ID
 std. lengths 25 ft.
 colors blue or black
 temp. range -20° to 180° F
 (intermit. to 225° F)
 options Avail. as 2PVW with wearstrip.
 (3" – 24" ID) Non-std IDs and
 lengths made to order. Cuffed
 ends avail. Also available as 1PV
 (one ply) for lighter applications.

Features: Flame retardant to UL94V-O. Resistant to ozone, UV rays, mildew. Impervious to leakage from most oils, water, chemicals and grease. Very cost-effective product for dust and fumes.



SLP-10
Single Ply Vinyl Coated Fiberglass

sizes 2" – 14" ID
 std. lengths 25 ft.
 colors grey
 temp. range 0° to 250° F
 options Ventilation of dry cleaning
 equipment, air intake and
 exhaust ducts, low volume
 air transfer.

Features: Flame retardant vinyl coated woven fiberglass cover permanently bonded to a PVC-coated spring steel wire helix. Meets UL181 class flammability rating.



FlexFlyte® VF
Single Ply Vinyl Coated Fiberglass

sizes 2" – 14" ID
 std. lengths 25 ft.
 colors grey
 temp. range -20° to 200° F
 options Ventilation of photo reproduction
 machines, fine dust collection
 systems, transfer of low volume
 cool and warm air. Lightweight
 alternative to 1PN.


Features: Fiberglass cover with flame retardant vinyl coating each side. Vinyl-coated spring steel wire helix permanently bonded to carcass. Flame retardant to UL94V-O. Excellent flexibility.



TD-S/TD-HS
Single/Two Ply Vinyl Laminate Polyester with Vinyl Scuff Strip

sizes 3" – 12" ID
 std. lengths 25 ft.
 colors black with orange
 wearstrip
 temp. range -40° to 180° F
 options Odd sized diameters and custom
 lengths available on request.
 Custom color wearstrip (minimum
 may apply).

Features: TD-S Vinyl laminate polyester fabric cover, enclosed spring steel wire helix, highly visible extruded vinyl orange scuff strip. Flame retardant to UL94V-O. Excellent flexibility. TD-HS Flame retardant to UL94V-O, highly visible extruded vinyl orange scuff strip, vinyl laminate polyester fabric-enclosed spring steel wire helix.

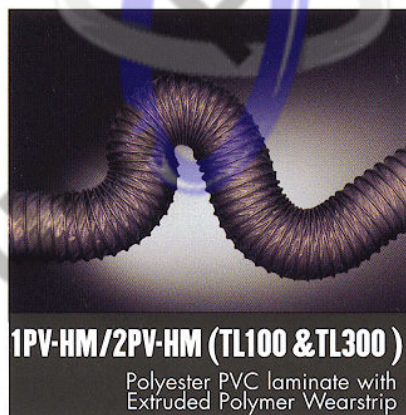

1PV-HM/2PV-HM (TL100 & TL300)
Polyester PVC laminate with Extruded Polymer Wearstrip

sizes 2" – 14" ID
 std. lengths 25 ft.
 colors grey, black, blue, white, yellow
 Available with custom colored
 wearstrip—Minimums Apply
 temp. range -20° to 180° F
 options Optional lengths and
 diameters available. Custom
 end finishes available.

Features: Heavy Duty Extruded Polymer Wearstrip for external abrasion resistance

TD-S, TD-HS		ID	2"	3"	4"	5"	6"	7"	8"	9"	10"	12"	14"	16"	18"
Working Pressure/PSI			31	28	24	20	18	15	12	10	8	6	5	4½	4
Negative Pressure/HG			28	24	18	16	17	10	8	6	5½	3	2	1	½

See page 7 for pressure nomograph