



Max-Flyte 1PV-EPW(WPV-W) 1PV-EP-HM

One Ply Polyester—Vinyl Laminate. Expanded Pitch with Vinyl Wearstrip

sizes	3" – 24" ID
std. lengths	25 ft.
colors	yellow with black wearstrip.
temp. range	-20° to 180° F (intermit. to 225° F)
options	Avail. as 1PVEP (less wearstrip). Non-std IDs and lengths avail.

Features: Lightweight, cost-effective, highly compressible for positive pressure movement of air, dust, fumes at lower temperature ranges. Flame retardant to UL94V-O rating.




Max-Flyte 1PN-EPW(WPC-W) 1PN-EP-HM

One Ply Polyester—Neoprene Coated. Expanded Pitch with Vinyl Wearstrip

sizes	3" – 24" ID
std. lengths	25 ft.
colors	yellow or black hose with black or yellow wearstrip.
temp. range	-40° to 250° F
options	Avail. as 1NN-EPW (Black Nylon) or 1CN-EPW (Cotton-Neoprene). Non-std IDs and lengths avail.

Features: Also available as 1PNEP. Heaviest duty of the Max-Flyte series. Flame retardant to UL94V-O rating.

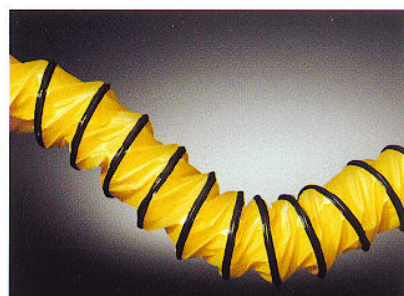

Max-Flyte 1PV-EPW-HT(WP-HT-W)

1 Ply High Temp Compound with Heavy Duty Wearstrip

sizes	4" – 24" ID
std. lengths	25 ft. (optional length available)
colors	black, olive drab, yellow
temp. range	-65° to 325° F
options	custom end finishes available, custom manufactured lengths available.

Features: Produced without use of solvents or adhesives. Features heavy duty polymer wearstrip for external abrasion resistance. Single seam carcass construction provides increased airflow characteristics.

**NOTE: Max-Flyte Series Available with Extruded Polymer Wearstrip.*



Therma-Cool PV & PN (WPI-W)

Two Ply Polyester—Vinyl Laminate (PV) or Neoprene (PN). Urethane Foam Insulating Material. Vinyl Wearstrip.

sizes	4" – 30" ID
std. lengths	25 ft.
colors	yellow hose with black wearstrip
temp. range	-20° to 180° F (PV) -40° to 250° F (PN)
options	Non-std IDs and lengths avail. Cuffed ends avail. Optional colors available.

Features: Insulated hose for the temporary transfer of heated or cooled air for climate conditioning. Flame retardant to UL94V-O rating.



Bag-A-Duct

1 Ply Polyester PVC with Self Storage Bag

sizes	6" – 20" ID
std. lengths	15 & 25 ft.
colors	yellow with black wearstrip (custom colors available)
temp. range	-20° to 180° F
options	Available in multiple colors and materials—minimums apply

Features: Complete with self storage bag for easy deployment and storage.



Belted Cuff: 3" – 24" ID

Nylon Ring: 3" – 24" ID

For Utility Blower Hoses, Belted Cuffs cinch for a secure fit to most stationary or portable blower units.

Nylon Rings interlock, for quick connecting of Utility Blower Hoses.

ID	4"	6"	8"	10"	12"
Working Pressure/PSI	13	11	8	7	5

See page 7 for pressure nomograph