

Super Vac-U-Flex®

PVC


- sizes | 1 1/4" - 4" ID
- std. lengths | 50 ft. (25' on 3" and 4")
- colors | grey
- temp. range | -20° to 150° F
- options | Commercial or industrial vacuum cleaners, ventilating or cooling industrial machinery, bilge pumps and bilge ventilation



Vac-U-Flex® CMD

PVC

- sizes | 3/4" - 1" ID
- std. lengths | 25 ft.
- colors | grey
- temp. range | -20° to 150° F
- options | Other diameters available with 3000' minimum order.

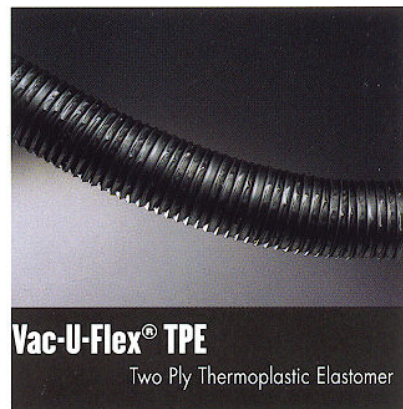

Vac-U-Flex® TPE

Two Ply Thermoplastic Elastomer

- sizes | 3/4" - 6" ID
- std. lengths | 25 ft.
- colors | black
- temp. range | -40° to 250° F
- options | Pitch, wall thickness, and length variations available with 3000' minimum order.

Features: High strength fiber reinforced PVC hose cover bonded to coated spring steel helix. Offers flexibility for ease of handling and installation. Optional colors and lengths available with 3000' minimum order.

Features: Flexible PVC hose jacket bonded to coated spring steel helix. Offers versatility and flexibility.

Features: Industrial weight, specially formulated thermoplastic elastomer (black) material; coated spring steel helix encapsulated and bonded to hose jacket. Offers flexibility; smooth bore; rubber-like characteristics. Exceptional toughness; resistant to most acids, alkalis, and solvents.



Vac-U-Flex® TPU

Two Ply Urethane

- sizes | 3/4" - 6" ID
- std. lengths | 25 ft.
- colors | clear
- temp. range | -40° to 200° F
- options | Color, pitch, wall thickness, and length variations available with 3000' minimum order.

Features: Flexible, smooth bore 100% clear thermoplastic polyurethane material; coated spring steel helix encapsulated and bonded to hose jacket. Offers high abrasion, puncture, and tear resistance; excellent chemical, oil, and fungus resistance. Low temperature flexibility.



Vac-U-Flex® Cuffs

Sizes: 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", and 3"

Color: grey

Options: Other sizes and colors available with minimum order quantity.

Features: Allow easy end termination of all Vac-U-Flex® products.

Super Vac-U-Flex®

ID	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	3"	4"	5"	6"
Working Pressure/PSI	48	33	45	36	35	26	23	20	20	14	—	—
Negative Pressure/HG	28	28	27	26	26	25	25	24	24	18	—	—

Vac-U-Flex® TPE

ID	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	3"	4"	5"	6"
Working Pressure/PSI	—	—	10	10	10	10	—	9	7	6	5	4
Negative Pressure/HG	—	—	28	28	28	28	—	28	28	28	18	10

Vac-U-Flex® TPU

ID	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	3"	4"	5"	6"
Working Pressure/PSI	—	—	13	10	—	8	—	7	6	5	5	4
Negative Pressure/HG	—	—	28	26	—	22	—	20	16	12	10	7

See page 7 for pressure nomograph