


Silicone Hose

2-Ply Silicone Coolant - Wire Reinforced

2-Ply Silicone Coolant Hose reinforced with helically-wound wire to increase burst pressure and resist kinking during installation.

Color blue.

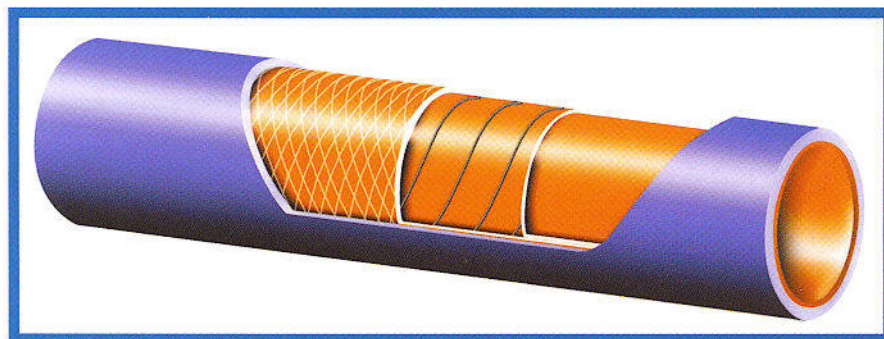

Applications

Low pressure coolant and heat connections in hostile engine environments. Resists aging, ozone, chemicals, lubricants, hardening and cracking.

Ideal for extreme temperature and various pressure ranges where high performance levels are required.

Temperature - Low/High	- 65°F to +350°F
Abrasion - Interior/Exterior	Good/Good
Flexibility	Excellent
Pressure	Positive
Chemical	Good
Standard Length	3' to 12' (Coolant)
Size - ID	.50" to 6" ID (Coolant)

2-Ply Silicone Coolant - Wire Reinforced

Diameter (I.D.)	Part #	Operating Pressure (P.S.I.G.)	Burst (P.S.I.G.)	Weight Lb/ft
.50	5579-0500	200	600	.20
.75	5579-0750	200	600	.25
1.00	5579-1000	175	550	.30
1.25	5579-1250	160	525	.37
1.50	5579-1500	160	500	.43
1.75	5579-1750	150	475	.50
2.00	5579-2000	140	450	.56
2.25	5579-2250	125	400	.64
2.50	5579-2500	100	350	.71
2.75	5579-2750	100	325	.78
3.00	5579-3000	100	300	.83
3.50	5579-3500	85	275	.97
4.00	5579-4000	75	250	1.11
5.00	5579-5000	40	150	1.38
6.00	5579-6000	35	125	1.65