


T331AH

RED COVER

T331AA

BLACK COVER

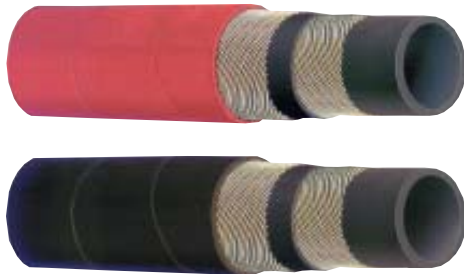

T333AA

BLACK COVER



250 PSI CHLOROBUTYL STEAM HOSE

APPLICATION

The transfer of saturated and superheated steam up to 250 PSI and max 430°F in shipyards, chemical plants and industrial applications.

- ★ Proper draining of steam hose after each use will increase service life, especially in a hot water application.

COVER

Red or black heat-resistant EPDM rubber. Wrapped cover fabric impression. Pin-pricked cover to allow venting.

REINFORCEMENT

High tensile spiral steel wire.

TUBE

Black Chlorobutyl. **Not for steam cleaner use.**

STANDARD LENGTH

50 or 100 feet.

WORKING PRESSURE

Constant Pressure — 17 Bar (250 PSI)

BRANDING

Embossed brand ALFAGOMMA – ITALY T331
17 BAR (250 PSI) STEAM – DRAIN AFTER USE

SERIES NO.	NOMINAL ID		NOMINAL OD		APPROX. WT. lbs./100 ft.	MIN. BEND RADIUS (In.)
	(in.)	(mm)	(in.)	(mm)		
T331AH/AA050	1/2	13	0.98	25	39	5
T331AH/AA075	3/4	19	1.26	32	52	7 1/2
T331AH/AA100	1	25	1.50	38	65	10
* T331AH/AA125	1 1/4	32	1.81	46	83	12 1/2
* T331AH/AA150	1 1/2	38	2.05	52	97	15
* T331AH/AA200	2	51	2.64	67	153	20

* T331AA/AH 1 1/4", 1 1/2" & 2" not suitable for "Ship to Shore" service.

REFER TO STEAM HOSE SAFETY FACTS PAGE 11

COUPLING SUGGESTIONS

Steel or malleable iron male insert NPT or female ground joint or washer type with spuds attached with 2 or 4 bolt interlocking clamps.

- ★ Universal quick acting couplings should not be used with *steam* hose.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE.

250 PSI REFINERY STEAM HOSE

APPLICATION

For use with saturated steam up to 406°F. in refineries, shipyards and chemical plants which require an oil-resistant cover. **Use with superheated steam will shorten hose life.**

- ★ Proper draining of steam hose after each use will increase service life, especially in a hot water application.

COVER

Black Nitrile-PVC/SBR rubber. Wrapped cover fabric impression. Impression branded. Pin-pricked cover to allow venting.

REINFORCEMENT

High tensile spiral steel wire.

TUBE

Black, heat-resistant EPDM rubber. **Not for steam cleaner use.**

STANDARD LENGTH

50 or 100 feet

WORKING PRESSURE

Constant Pressure — 17 Bar (250 PSI)

BRANDING

Embossed brand ALFAGOMMA – ITALY – T333 – 17 BAR (250 PSI) STEAM – DRAIN AFTER USE

T333AA – BLACK COVER

SERIES NO.	NOMINAL ID		NOMINAL OD		APPROX. WT. lbs./100 ft.
	(in.)	(mm)	(in.)	(mm)	
T333AA075	3/4	19	1.30	33	53
T333AA100	1	25	1.54	39	65

REFER TO STEAM HOSE SAFETY FACTS PAGE 11

COUPLING SUGGESTIONS

Steel or malleable iron male insert NPT or female ground joint or washer type with spuds attached with 2 or 4 bolt interlocking clamps.

- ★ Universal quick acting couplings should not be used with *steam* hose.