


SIGHT GAUGES

Rubber Fab sight gauges are sturdy and perform well in high-stress applications. These sight gauges are high- and low-temperature rated, have a high pressure rating, and are unaffected by ultra-violet rays or sunlight. Rubber Fab's sight gauges are non-contaminating and will not impart odor or taste. Their smooth, non-stick surface cleans easily, promotes minimal pressure drop, and will not discolor. The fitting surface finish exceeds sanitary design standards.

RF-SG
RF-CSG
RF-FTSG
RF-PSSG
RF-BSG

RF-SG – Non-Caged FEP Sight Gauge

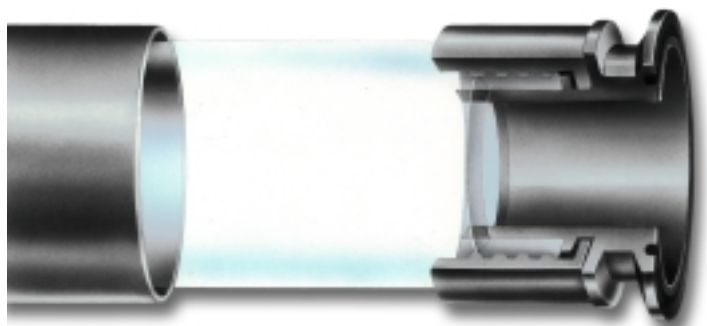


TEMPERATURE:
-100°F to 400°F

Part Number	I.D.	Wall Thickness	Working Pressure*	Min. Burst @ 68°F
08RFSG	.50	0.100	200 psi	600 psi
12RFSG	.75	0.125	200 psi	600 psi
16RFSG	1.0	0.125	150 psi	450 psi
24RFSG	1.5	0.125	150 psi	450 psi
32RFSG	2.0	0.125	150 psi	450 psi
40RFSG	2.5	0.150	150 psi	450 psi
48RFSG	3.0	0.180	100 psi	300 psi
64RFSG	4.0	0.210	100 psi	300 psi

*at 68°F

RF-CSG – Caged FEP Sight Gauge

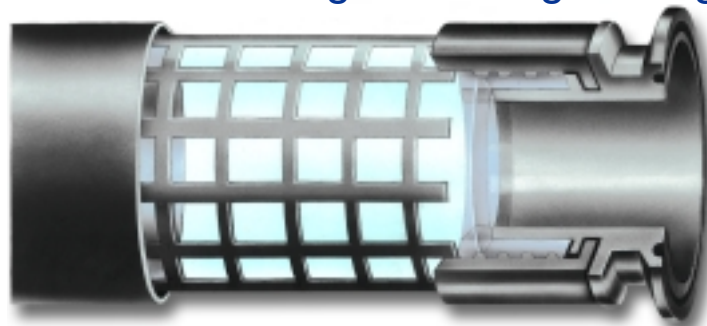


TEMPERATURE:
-100°F to 400°F

Part Number	I.D.	Working Pressure*	Min. Burst @ 68°F
16RFCSG	1.0	250 psi	750 psi
24RFCSG	1.5	250 psi	750 psi
32RFCSG	2.0	250 psi	750 psi
40RFCSG	2.5	250 psi	750 psi
48RFCSG	3.0	200 psi	600 psi
64RFCSG	4.0	200 psi	600 psi

*at 68°F



RF-FTSG – Flared FEP Sight Gauge

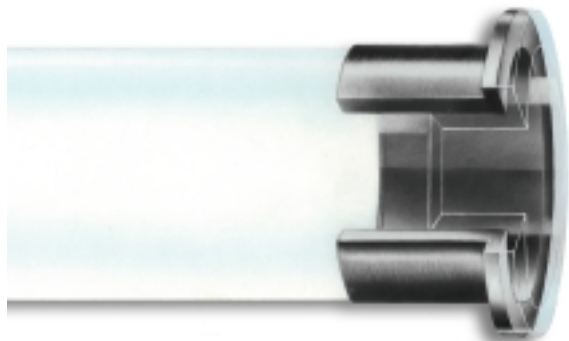


TEMPERATURE:
-100°F to 400°F

Part Number	Size	Working Pressure*	Min. Burst @ 68°F
08RFFTSG	.50	200 psi	600 psi
12RFFTSG	.75	200 psi	600 psi
16RFFTSG	1.0	150 psi	450 psi
24RFFTSG	1.5	150 psi	450 psi
32RFFTSG	2.0	150 psi	450 psi
40RFFTSG	2.5	150 psi	450 psi
48RFFTSG	3.0	150 psi	450 psi
64RFFTSG	4.0	100 psi	300 psi

*at 68°F

RF-PSSG – Polysulfone Sight Gauge

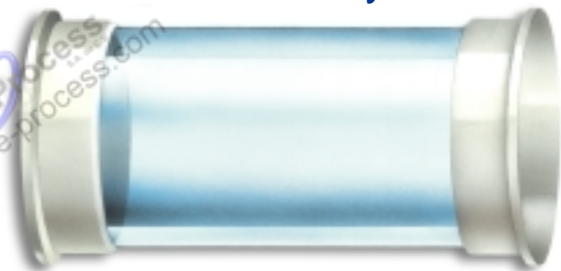


TEMPERATURE:
-20°F to 240°F

Part Number	Size	Part Number	Size
003RFPSSG	3 mm	16RFPSSG	1.0 ladish TC
006RFPSSG	6 mm	24RFPSSG	1.5
01RFPSSG	10 mm	32RFPSSG	2.0
08RFPSSG	.50	40RFPSSG	2.5
12RFPSSG	.75	48RFPSSG	3.0
16RFPSSGMX	1.0 maxi	64RFPSSG	4.0

AVAILABLE LENGTHS:
6", 12", 18", 24" and custom lengths

RF-BSG – Bolted Sight Gauge

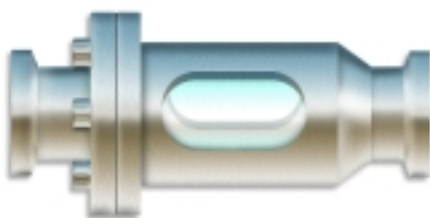

Part Number	I.D.	O.A.L.	No. of Bolts
08RFBSG	.50	3.00	4
12RFBSG	.75	3.00	4
16RFBSG	1.0	3.625	4
24RFBSG	1.5	3.625	4
32RFBSG	2.0	3.625	4
40RFBSG	2.5	3.625	6
48RFBSG	3.0	3.625	6
64RFBSG	4.0	3.625	8

Please consult manufacturer for operating pressures and temperatures.

RF-SG RF-CSG

Features

- Safe and unbreakable
- Sturdy, favorable in high stress applications
- High and low temperature rated
- Smooth, non-stick surface cleans easily and promotes minimal pressure drop
- Non-contaminating
- Imparts no taste or odor
- High-pressure rating. Fitting surface finish exceeds sanitary design standards
- Will not discolor
- Unaffected by Ultra-violet or sunlight
- Allows flow check
- Liquid level indicators

RF-FTSG

Features

- Durable, favorable in high stress applications
- High and low temperature rated
- Smooth, non-stick surface cleans easily and promotes minimal pressure drop
- Non-contaminating, won't add taste or color
- High-pressure rating. Fitting surface finish exceeds sanitary design standards
- Will not discolor
- Unaffected by Ultra-violet or sunlight

RF-BSG

Features

- Provides fast, continuous inspection from all angles
- Available with Pyrex or Polysulfone inserts
- Comes standard with Buna-N seals and are available with FKM Fluoroelastomer and Silicone.
- Bevel Seat, Butt Weld, I-Line or Q-Line end configurations available



Rubber Fab Technologies Group is a member of:

