

ACUTECH DUALITY™ TUBING

Duality™ provides the benefits of natural FEP, such as chemical resistance, low coefficient of friction and high purity, with the abrasion resistance, strength and toughness of LDPE. An odorless and tasteless material, Duality™ offers a continuous service temperature of -25°F to 175°F.


PRODUCT FEATURES

- High purity
- Excellent chemical resistance
- Low coefficient of friction
- Non-photo active
- Odorless and tasteless
- Flexible
- Good abrasion resistance
- Continuous service temperature -25°F to 175°F
- FDA approved

TYPICAL APPLICATIONS

- Gas and water sampling
- X-ray/photographic development equipment

Custom sizes and colors available

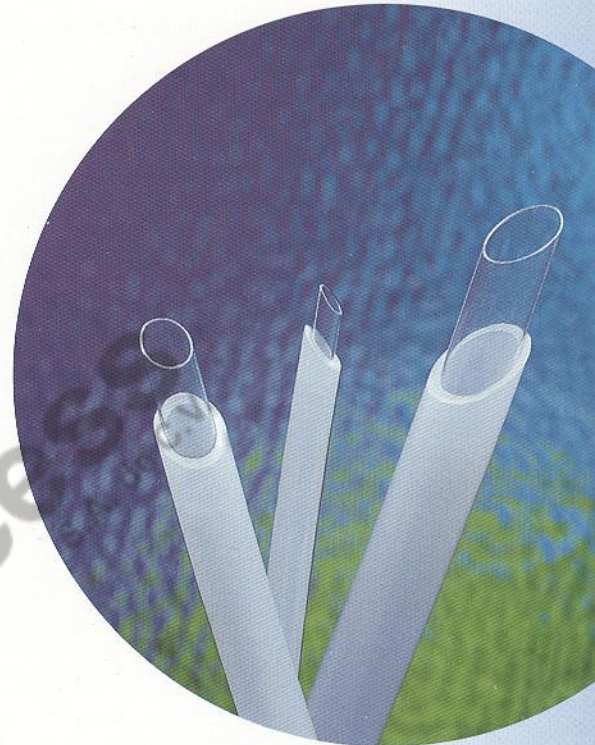

*Acutech
Duality™
Tubing*

STOCK SIZES AVAILABLE FOR IMMEDIATE SHIPMENT

TUBING

Nominal O.D.	Nominal I.D.	FEP wall thickness
1/4	1/8	.010"
1/4	3/16	.010"
5/16	1/4	.010"
3/8	1/4	.010"
7/16	3/8	.012"
1/2	3/8	.012"
5/8	1/2	.015"

Stock is in 50- and 100-ft. lengths.

Jacket Hardness: Shore D 48

Jacket Density: .918"

Stock sizes subject to change.