

CHEMFLUOR® ETFE TUBING

Manufactured with Tefzel®*, a resin that has improved mechanical properties over fluoropolymers such as PFA or FEP, Chemfluor® ETFE is resistant to abrasion, radiation and impact. The material is weather-resistant and inert to most solvents and chemicals. And, it has a continuous service temperature of 300°F.

Due to its mechanical properties, Chemfluor® ETFE can be used to manufacture valves, fittings, bearings, pump components and electrical coatings. Chemfluor® ETFE meets ASTM standard D3159.

PRODUCT FEATURES

- Mechanical strength
- Abrasion resistance
- Broad temperature range
- Good chemical resistance
- Continuous service temperature 300°F

TYPICAL APPLICATIONS

- Valves
- Fittings
- Bearings
- Pump components
- Electrical coatings
- Laboratory


Custom sizes and colors available

STOCK SIZES AVAILABLE FOR IMMEDIATE SHIPMENT (FOR ROD SIZES & AVAILABILITY, SEE PAGE 17)

TUBING

O.D., inches	I.D., inches	Nominal Wall, inches
1/16	.016	.023
1/16	.020	.021
1/8	1/16	.031
1/8	3/32	.016
3/16	.140	.024
1/4	3/16	.031
1/4	1/8	.062
5/16	.232	.040
3/8	.278	.048
1/2	3/8	.062

Stock is in 50- and 100-ft. lengths.
Stock sizes subject to change.

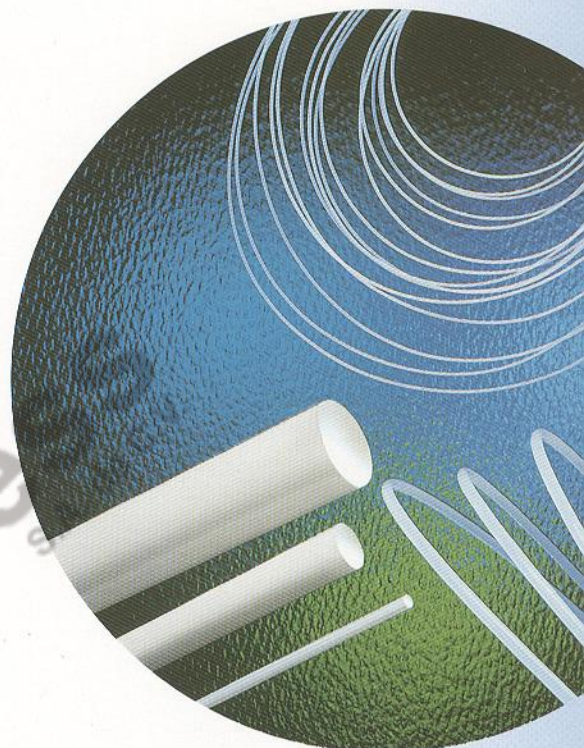

*Chemfluor® ETFE
Tubing*

*Tefzel® is a registered trademark of DuPont.