


NEW HOSE TEC™ Flexible Pump Connectors

Agriculture • Chemicals/Petroleum • Construction • Material Handling


HTIF Series Flanged Flexible Pump Connectors

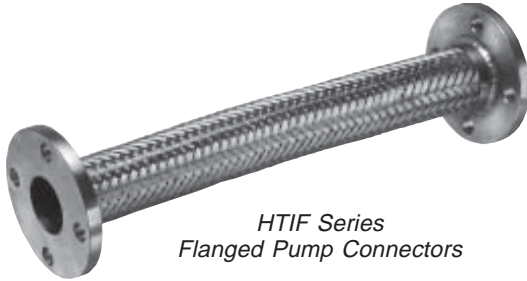

HTIF Series
Flanged Pump Connectors

Features —

- Absorbs misalignment, vibration and sound.
- Excellent corrosion-resistance.
- Withstands high pressure.
- Easy installation.
- Excellent for use with moderate chemicals and acids, most oils, fats and grease and many solvents.

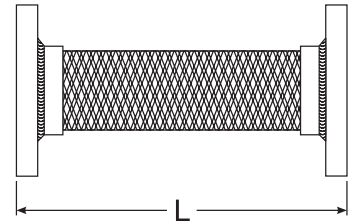


Construction — Stainless steel hose and single braid. Carbon steel 150# forged flange end connections.


HTIF Series Standard Length Flanged Pump Connectors

Part Number	I.D. (In.)	"L" Overall Length (In.)	Live Length (In.)	Fitting Length Each End	Working Pressure PSI @ 70° F.	Weight per Unit (Approx. lbs.)	List Price
HTIF 20X9	2"	9"	6 7/8"	5/8"	400	11	
HTIF 25X9	2 1/2"	9"	6 7/8"	5/8"	285	14	
HTIF 30X9	3"	9"	6 7/8"	5/8"	240	15	
HTIF 40X9	4"	9"	6 3/8"	5/8"	260	22	
HTIF 50X11	5"	11"	8 1/4"	3/4"	220	29	
HTIF 60X11	6"	11"	8 1/4"	3/4"	200	36	
HTIF 80X12	8"	12"	9"	1"	190	60	
HTIF 10X13	10"	13"	10"	1"	165	85	
HTIF 12X14	12"	14"	11"	1"	125	120	

HTIM Series MNPT Flexible Pump Connectors

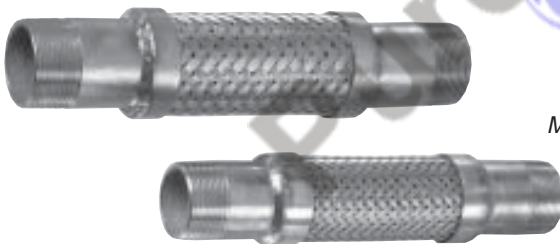

HTIM Series
MNPT Pump Connectors

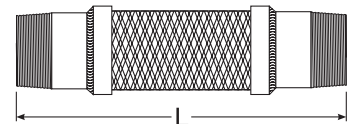

Construction — Stainless steel hose and single braid. Carbon steel Schedule 40 male NPT end connections.

HTIM Series Standard Length MNPT Pump Connectors

Part Number	I.D. (In.)	"L" Overall Length (In.)	Live Length (In.)	Fitting Length Each End	Working Pressure PSI @ 70° F.	Weight per Unit (Approx. lbs.)	List Price
HTIM 50	1/2"	6 1/2"	2 1/4"	1 1/2"	1125	0.6	
HTIM 75	3/4"	7"	2 1/4"	1 1/2"	760	0.8	
HTIM 100	1"	8"	3"	1 3/4"	525	1.0	
HTIM 125	1 1/4"	8 1/2"	3"	2"	490	1.5	
HTIM 150	1 1/2"	9"	3 1/2"	2"	450	2.0	
HTIM 200	2"	10 1/2"	4 1/2"	2 1/4"	400	2.7	
HTIM 250	2 1/2"	12"	5 1/2"	2 1/2"	285	4.0	
HTIM 300	3"	14"	6"	3"	240	6.0	
HTIM 400	4"	16"	8"	3"	200	9.0	

All prices and specifications subject to change without notice.